

In compliance with Regulation 305/2011/EU of the European Parliament and of the Council of 9 March 2011 (the Construction Products Regulation - CPR) this certificate applies to the construction product

## **Particleboard of the technical classes P2 with increased demands on fire performance**

according to the product specification listed in the current addendum to this certificate produced by

**Company**  
**FUNDERMAX GMBH**  
**Bickfordstraße 6**  
**AT-7201 Neudörfel**

and produced in the manufacturing plant

**AT-7201 Neudörfel, Bickfordstraße 6**

This certificate attests that all provisions concerning the assessment and verification of constancy of performance described in Annex ZA of the standard



**EN 13986:2004+A1:2015**

under system 1 being certified for the performances set out in this certificate are applied and that the construction product fulfils all the prescribed requirements for these performances.


**Certificate number:** 1359-CPR-0681  
**Date of first issue:** 12.05.2016  
**Date of issuance:** 12.05.2016

This certificate will remain valid as long as the test methods and/or factory production control requirements included in the harmonised standard used to assess the performances of the declared essential characteristics, do not change, and the construction product, and the manufacturing conditions in the plant are not modified significantly, unless suspended or withdrawn by the product certification body.

For the validity of this certificate see [www.holzforschung.at](http://www.holzforschung.at).



**Dr. Andreas Neumüller**  
Authorised signatory

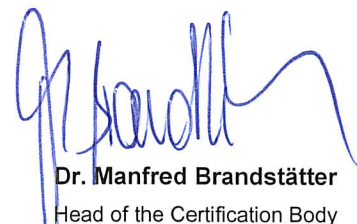

**Dr. Manfred Brandstätter**  
Head of the Certification Body

# Annex to Certificate 1359-CPR-0681

Date of issue: 12.05.2016

## Scope of certification for the following products:

Product:	Particleboards for interior fitments for use in dry conditions with increased demands on fire performance
Technical class:	P2 according to EN 312
Thickness range:	12 – 38 mm
Density requirements:	Thickness 12 mm: 740 kg/m <sup>3</sup> Thickness 38 mm: 650 kg/m <sup>3</sup>
Fire performance:	B-s2, d0
Formaldehyde emission class:	E1